


## ● High Pressure Oxygen Fill Valve (HPOFV)

For aircraft and other high pressure oxygen systems

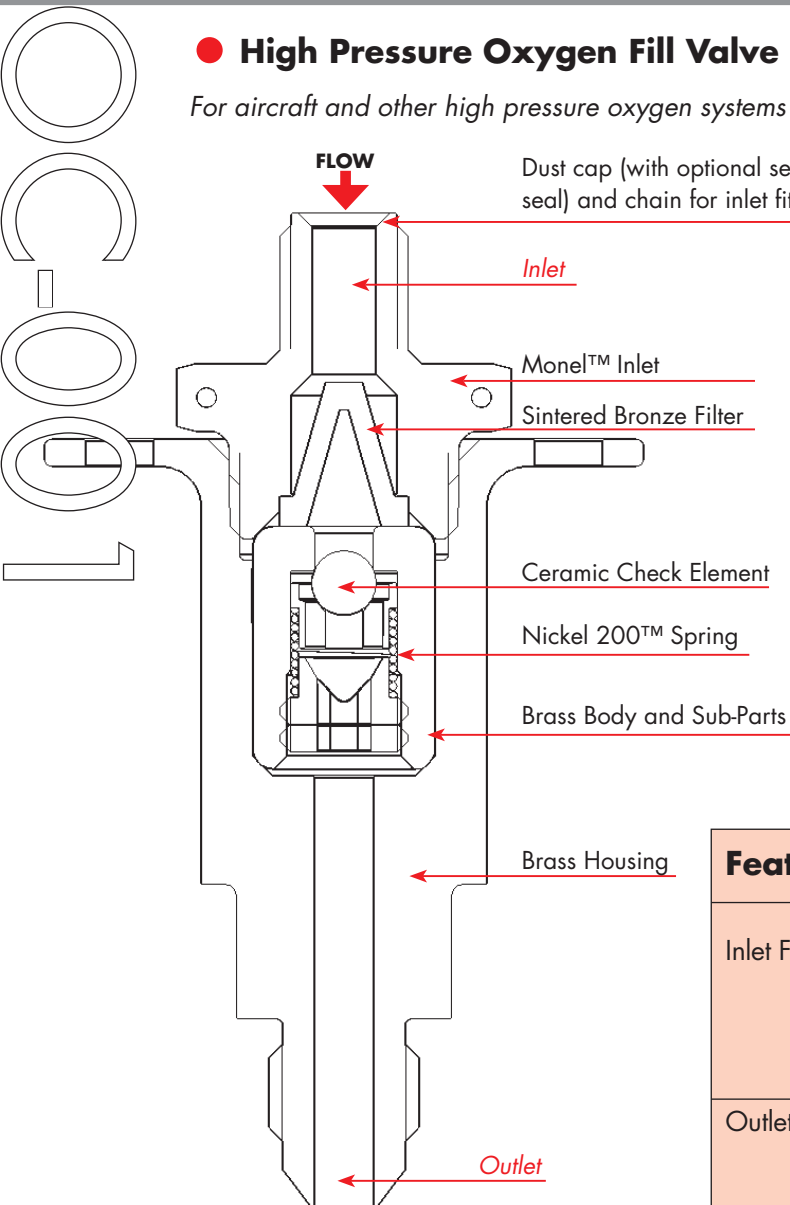


- Optional dust cap and chain for inlet fitting
- Valve body lock-wired to housing
- Custom external housing styles and mounting points available

### ● Ordering Code

Include Option(s) from table below:



Please specify details for any custom requirements.

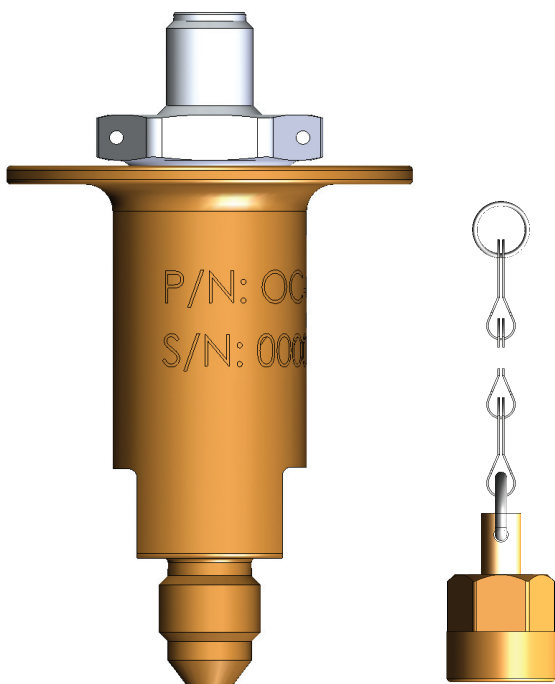

Feature	Option	Description
Inlet Fitting	1	3/8" X 24 UNF -3A thread with 50° female taper, conforms to: AND10089 STYLE E SIZE 3
	C	Custom – Please specify
Outlet Fitting	1	3/8" X 24 UNF -3A thread with 50° female taper, conforms to: AND10089 STYLE E SIZE 3
	2	1/2" X 20 UNJF - 3A thread with 37° male taper, conforms to: MS33656 STYLE G SIZE 5
	3	7/16" X 20 UNJF - 3A thread with 37° male taper, conforms to: MS33656 STYLE G SIZE 4
	4	1/2" X 20 UNJF - 3A thread, non-tapered
	C	Custom – Please specify
Mounting	1	3 X ø 5.1 mm holes in housing flange
	C	Custom – Please specify
Overall Length	...	76 mm (3.0") *
Overall Diameter	...	45 mm (1.8") *
Mass	Check Valve	182 g (0.4 lb) *
	Dust Cap	23 g (0.05 lb) *

\* Depends on end fittings